


## Armless Chair

















# Assembly Manual

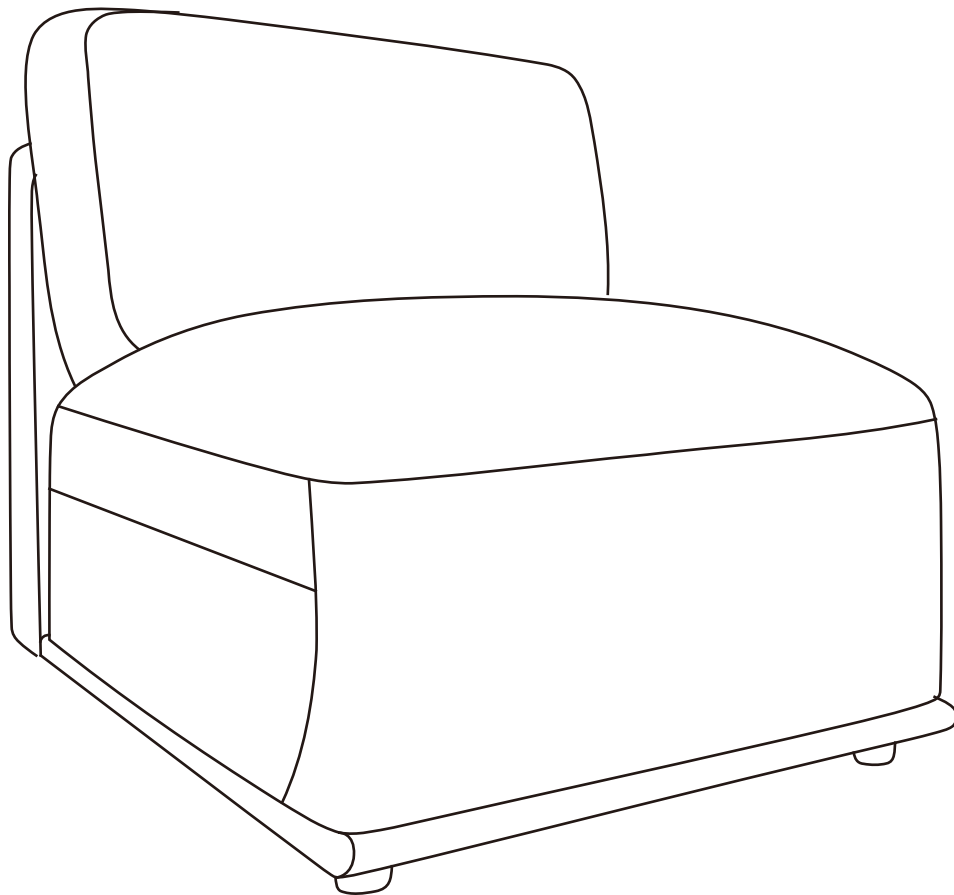

### CAUTION

THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.  
PLEASE READ AND KEEP FOR FUTURE REFERENCE.

Count parts before assembling.

Ax1  Seat Base	Bx1  Backrest	Cx1  Seat Cushion Core	Dx1  Seat Cushion Case
Ex1  Back Cushion	Fx4  Leg	Gx6  M8 x 70mm Bolt	Hx4  M8 x 20mm Bolt
Ix6  Ø8xØ22 Flat Washer	Jx2  M8 Butterfly Nut	Kx1  #5 Allen Wrench	Lx1  Square Connector
Extra Hardware    			

Please read through the instructions below to familiarize yourself with the parts and steps before assembly.

**⚠ Do not start the assembly process until all boxes are present.**


## ASSEMBLY INSTRUCTIONS

### Step 1

Please lay all parts on a soft and smooth surface to assemble.


Take out the Seat Base (A), Backrest (B), vacuum-packed Seat Cushion Core (C) and Back Cushion (E), Seat Cushion Case (D), Back Cushion (E), hardware pack and Legs (F) from the Armless Box.

Cut the vacuumed bags carefully to take out the Seat Cushion Core (C) and Back Cushion (E). Please allow up to 72 hours for the cushions to return to the original thickness.

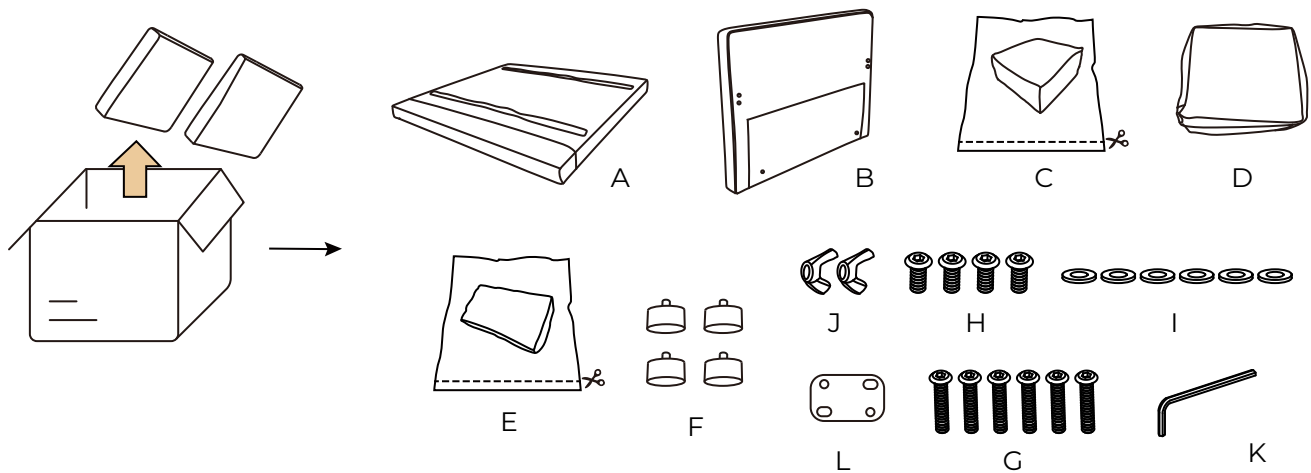


### Step 2

Place the Seat Base (A) and the Backrest (B) on the floor and black fabric facing you. Unzip the bottom of the Seat Base (A) and attach the Seat Base (A) to the Backrest (B), using Flat Washers (I), M8 x 70mm Bolts (G) and the Allen Wrench (K). Fully tighten and zip up the bottom of the Seat Base (A).

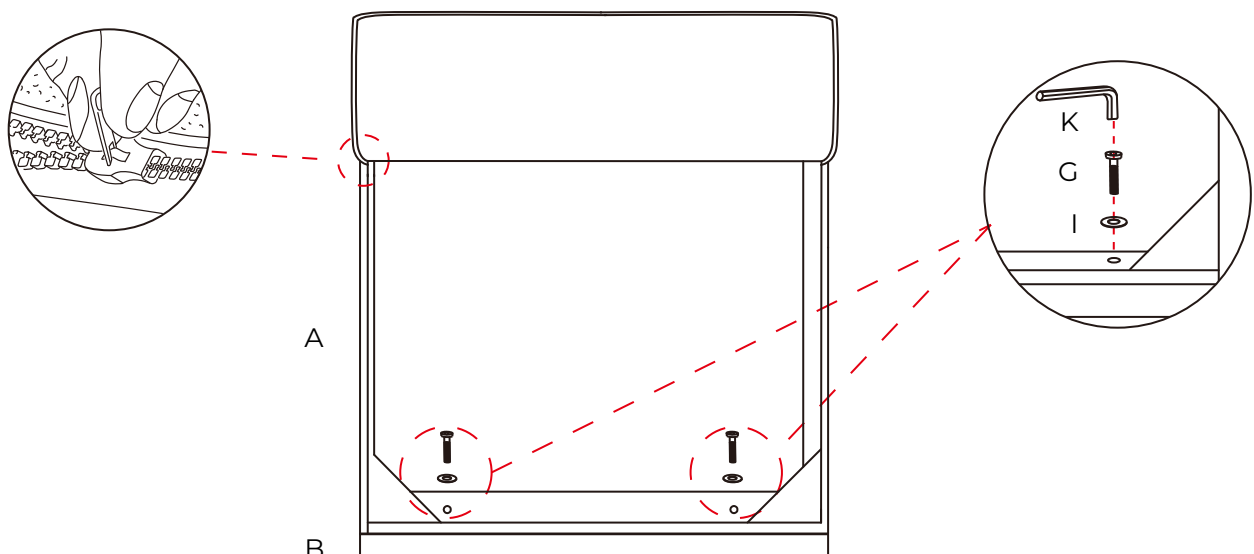


## Step 3

Rotate the Legs (F) firmly.

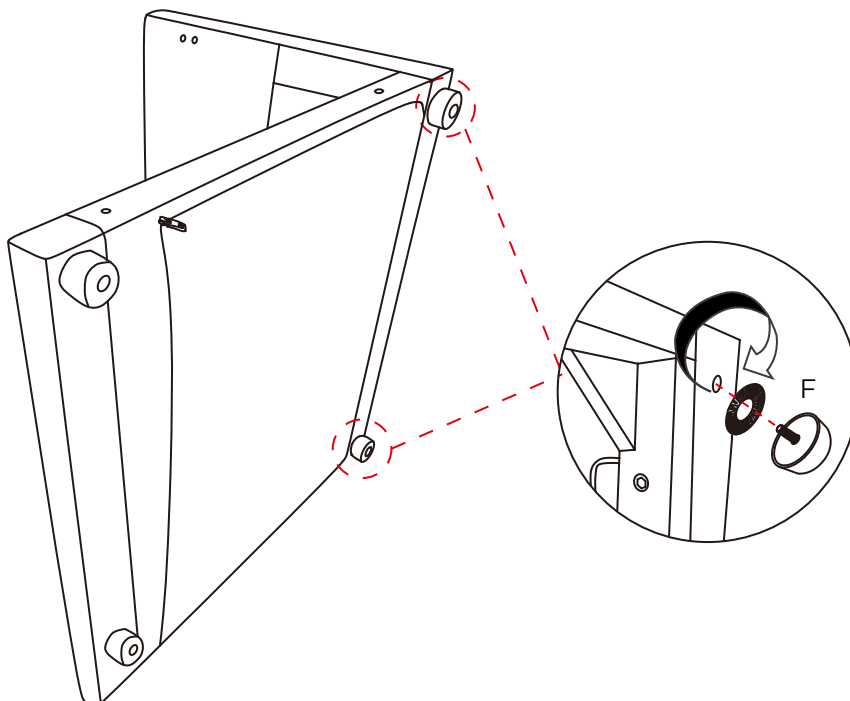

## Step 4



Remove the velcro protectors on the top of the Seat.

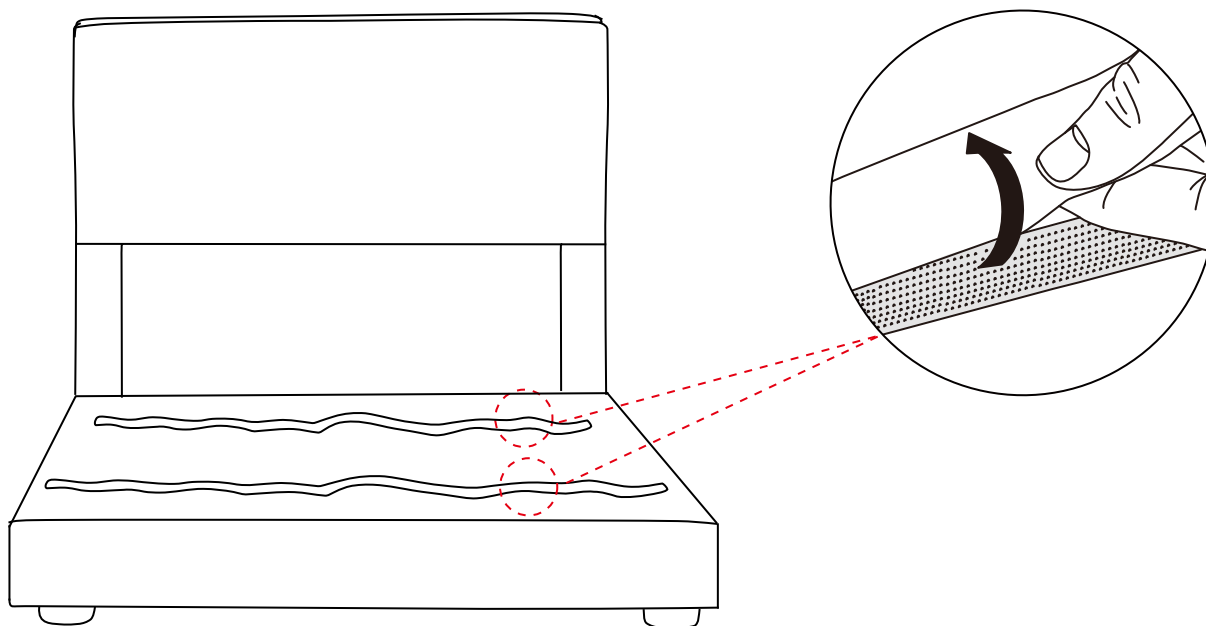

## Step 5

Insert the Seat Cushion Core (C) into the Seat Cushion Case (D).

Fluff the seat cushion and back cushion, and put them on the chair to complete the assembly of your Armless Chair.

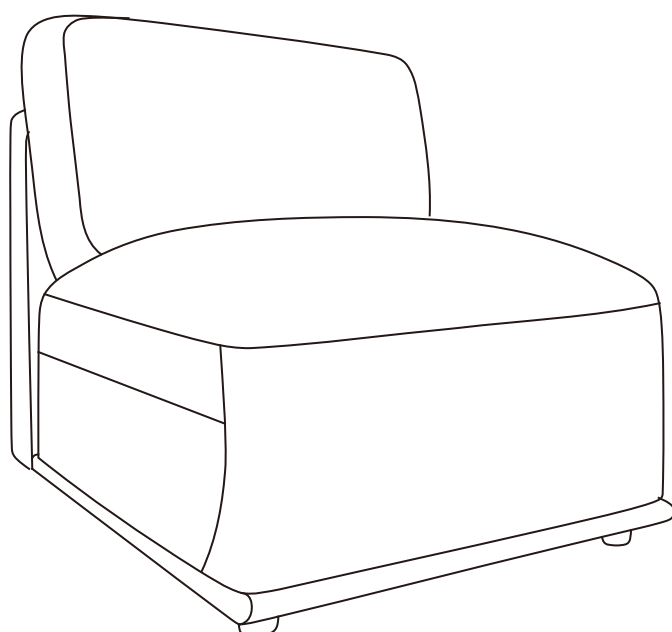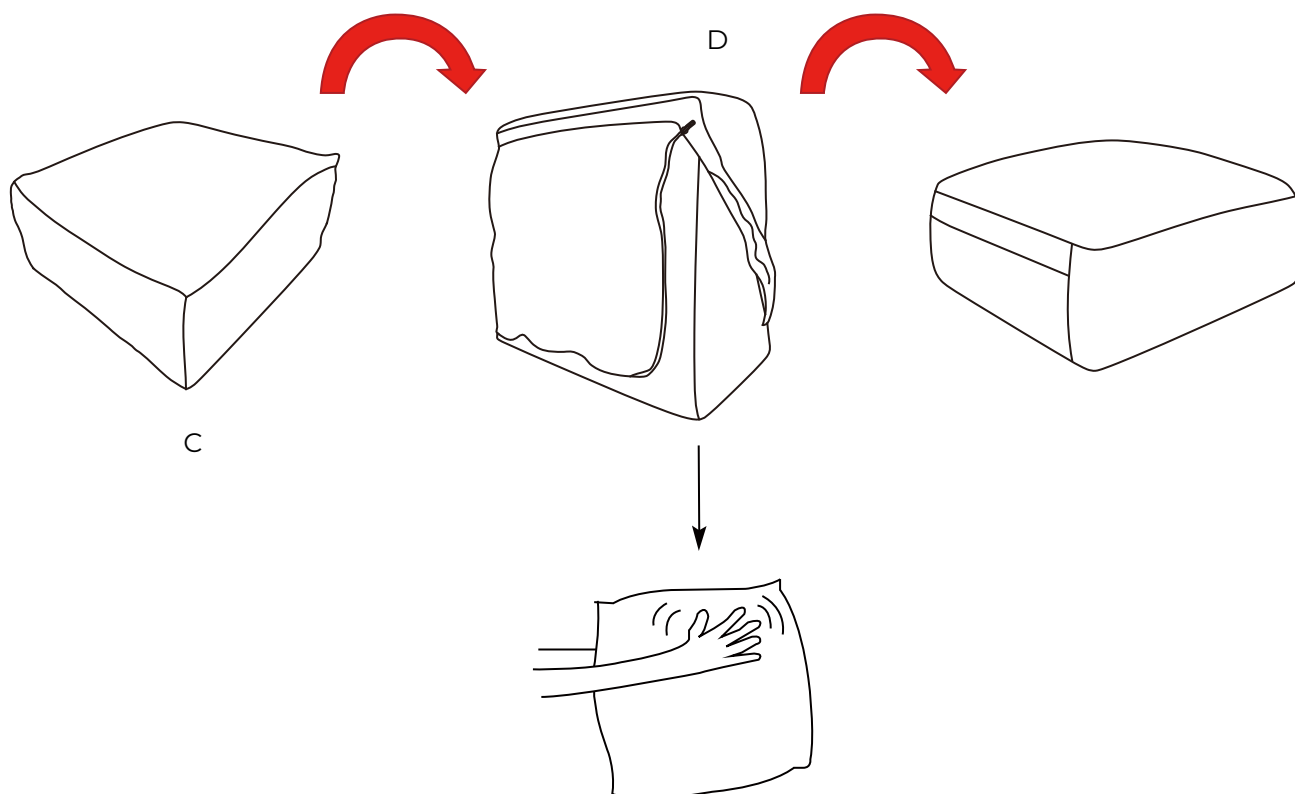


Congratulations!  
Armless Chair is ready!

## HOW TO CONNECT

### Step 1


Place the chairs side by side on the floor and black fabric facing you. Connect each chair using M8 x 70mm Bolts (G), Flat Washers (I), Butterfly Nuts (J), and the Allen Wrench (K). Fully tighten.

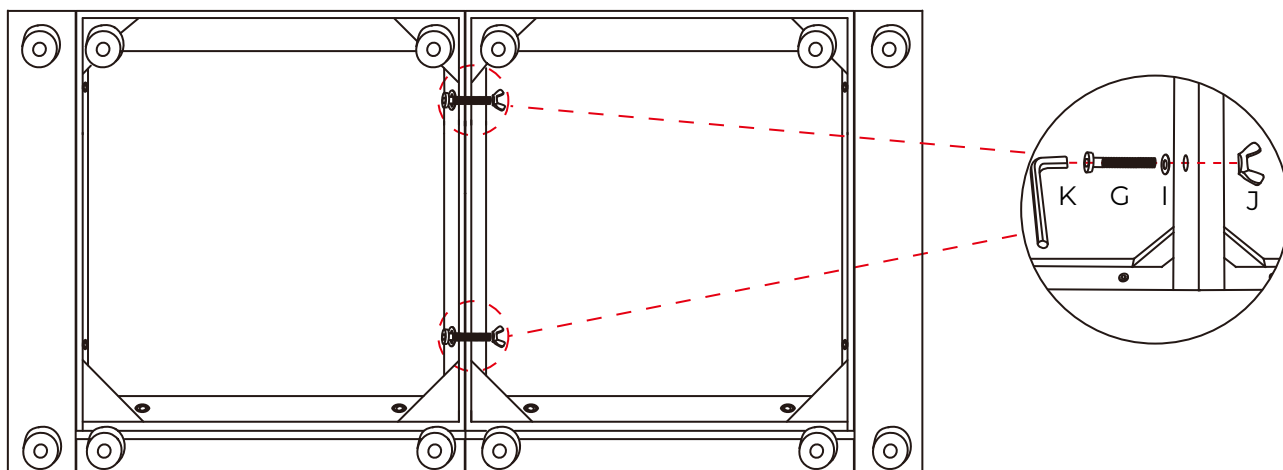

### Step 2

Gently place the sofa in the upright position. It's best to have two people lift the sofa - one at each end- and place it on its legs.

Attach the Corner Connectors and Square Connectors (L), using M8 x 20mm Bolts (H) and the Allen Wrench (K). Loosely attach the bolts to get the alignment right rather than fully tightening one before others. Once all bolts are aligned, fully tighten them.

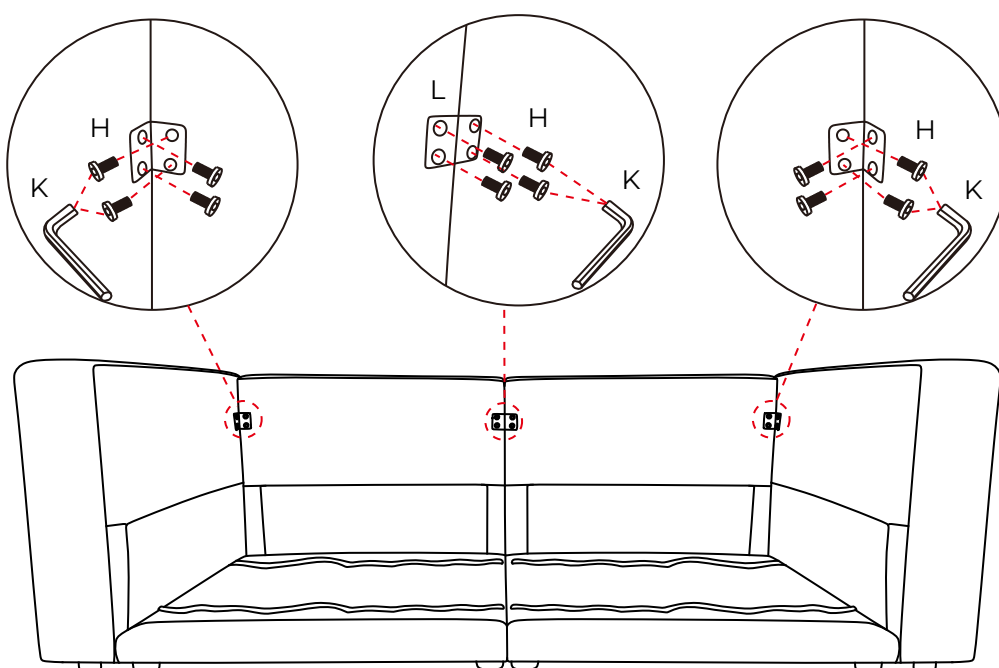

## PRODUCT WARRANTY

- 1-year limited on cover against splitting, peeling, and/or tearing.
- 1-year limited on frame construction.
- 1-year limited on cushioning material.

## CARE & MAINTENANCE

### For non-removable areas:

Blot and spot clean immediately with a clean, absorbent cloth and a water-free stain remover (Cleaning Code: S).

### For cushion covers:

- Ⓟ Dry clean only.
- ☒ Do not tumble dry.
- ☒ Do not bleach.
- ☒ Iron at low temperature (230°F/110°C or below).

## Follow Us



@chitalivingofficial



@chitaliving



@chitaliving



@chitaliving

If at any step you need a helping hand, we're always here for you. You can email us, or hop into a live chat on our website - whatever method is convenient for you.



support@chitaliving.com